

# OPTIONS and SPECIFICATIONS

Specifications listed are for base models only. Refer to [elmersmfg.com](http://elmersmfg.com) for specific details on all models.

Model >>	1100	1300	1600	2000
900/60 R32 Lug High Flotation Tires	s	--	--	--
LSW 1100/45R46	o	--	--	--
IF1250/50 R32CFO	o	s	--	--
LSW 1400/30R46	o	o	--	--
TT324- Transfer Track (36" x 140")	o	o	--	--
LT378- Large Track (36" x 170")	o	o	s	s
Brakes (Hydraulic), only available with track model	--	--	o	o
5 Point Scale	o	o	s	s
Haulmaster Connect Scale Indicator (Includes Tablet and Mount)	o	o	o	o
Haulmaster PRO	o	o	o	o
Agrimatics Scale Indicator	o	o	o	o
DigiStar GT560 Scale Indicator	o	o	o	o
20 oz. Manual Roll Tarp	o	o	o	o
20 oz. Electric Roll Tarp w/Switch	o	o	o	o
Hydraulic Auger Drive	o	o	--	--
Pivoting Auger	s	s	s	s
2 Camera Ag Cam w/9" Display	o	o	o	o
Hydraulic Jack (additional hydraulic circuit required)	o	o	o	o
Track Mud Scrapers	o	o	o	o
Tow Hitch	o	o	o	o
Width	12'	12' 2"	13' 11"	13' 11"
Overall Length	32' 4"	32' 4"	37' 10"	37' 10"
Tank Length	22' 8"	22' 8"	28' 3"	28' 3"
Loading Side Height	10'	11'	10' 5"	11' 4"
Transport Height	11' 4"	12' 4"	11' 9"	12' 8"
Auger Max Height	16'	16'	17' 2"	17' 2"
Auger Max Reach	10' 6"	10' 6"	10' 11"	10' 11"
Empty Weight w/ Large Tracks	30,100 lbs	30,500 lbs	33,200 lbs	33,900 lbs
Empty Weight w/ Transfer Tracks	27,600 lbs	28,000 lbs	--	--
Empty Weight w/ Wheels (1250 Tires)	23,300 lbs	23,700 lbs	--	--
Tongue Weight	4,000 lbs	4,000 lbs	4,200 lbs	4,200 lbs
Standard Tire/Wheel	900/60 R32	1250/40 R46	36"x170" Track	
Unloading Auger	22"	22"	24"	24"
Horizontal Auger	22"	22"	22"	22"
Hydraulic Remotes <sup>1</sup>	4	4	4	4
Req Tractor HP (Kw)	200 (150)	275 (200)	350 (260)	400 (300)

<sup>1</sup> Haulmaster PRO Reduce To 1 Remote, Optional Hydraulic Jack Add 1 Remote

o = optional | s = standard | -- = not available

# HAULMASTER

RIGHT OR LEFT HAND AUGER AVAILABLE



ELMERSMFG.COM



# POWERMASTER

Custom Designed Direct Drive Gearbox

Custom designed (patent pending) direct drive gearbox eliminates belts while increasing throughput efficiency.


- Exceptionally low profile design.
- Reduces maintenance.
- Improves grain flow efficiency.
- Increases auger output capacity at the same horsepower.
- Manual horizontal auger disconnect if necessary.



## TOP FEATURES

- Low Profile Design.
- Custom Tarp System.
- LED Marker Lights.
- Fully Welded Undercarriage.
- 4 Way Spout Control.
- Toolbox Standard.
- Multiple Tire Options.
- Tow Hitch Option.
- POWERMASTER Gearbox.
- HAULMASTER CONNECT.
- HAULMASTER PRO.

## INDUSTRY LEADING DESIGN TO MAXIMIZE YOUR HARVEST

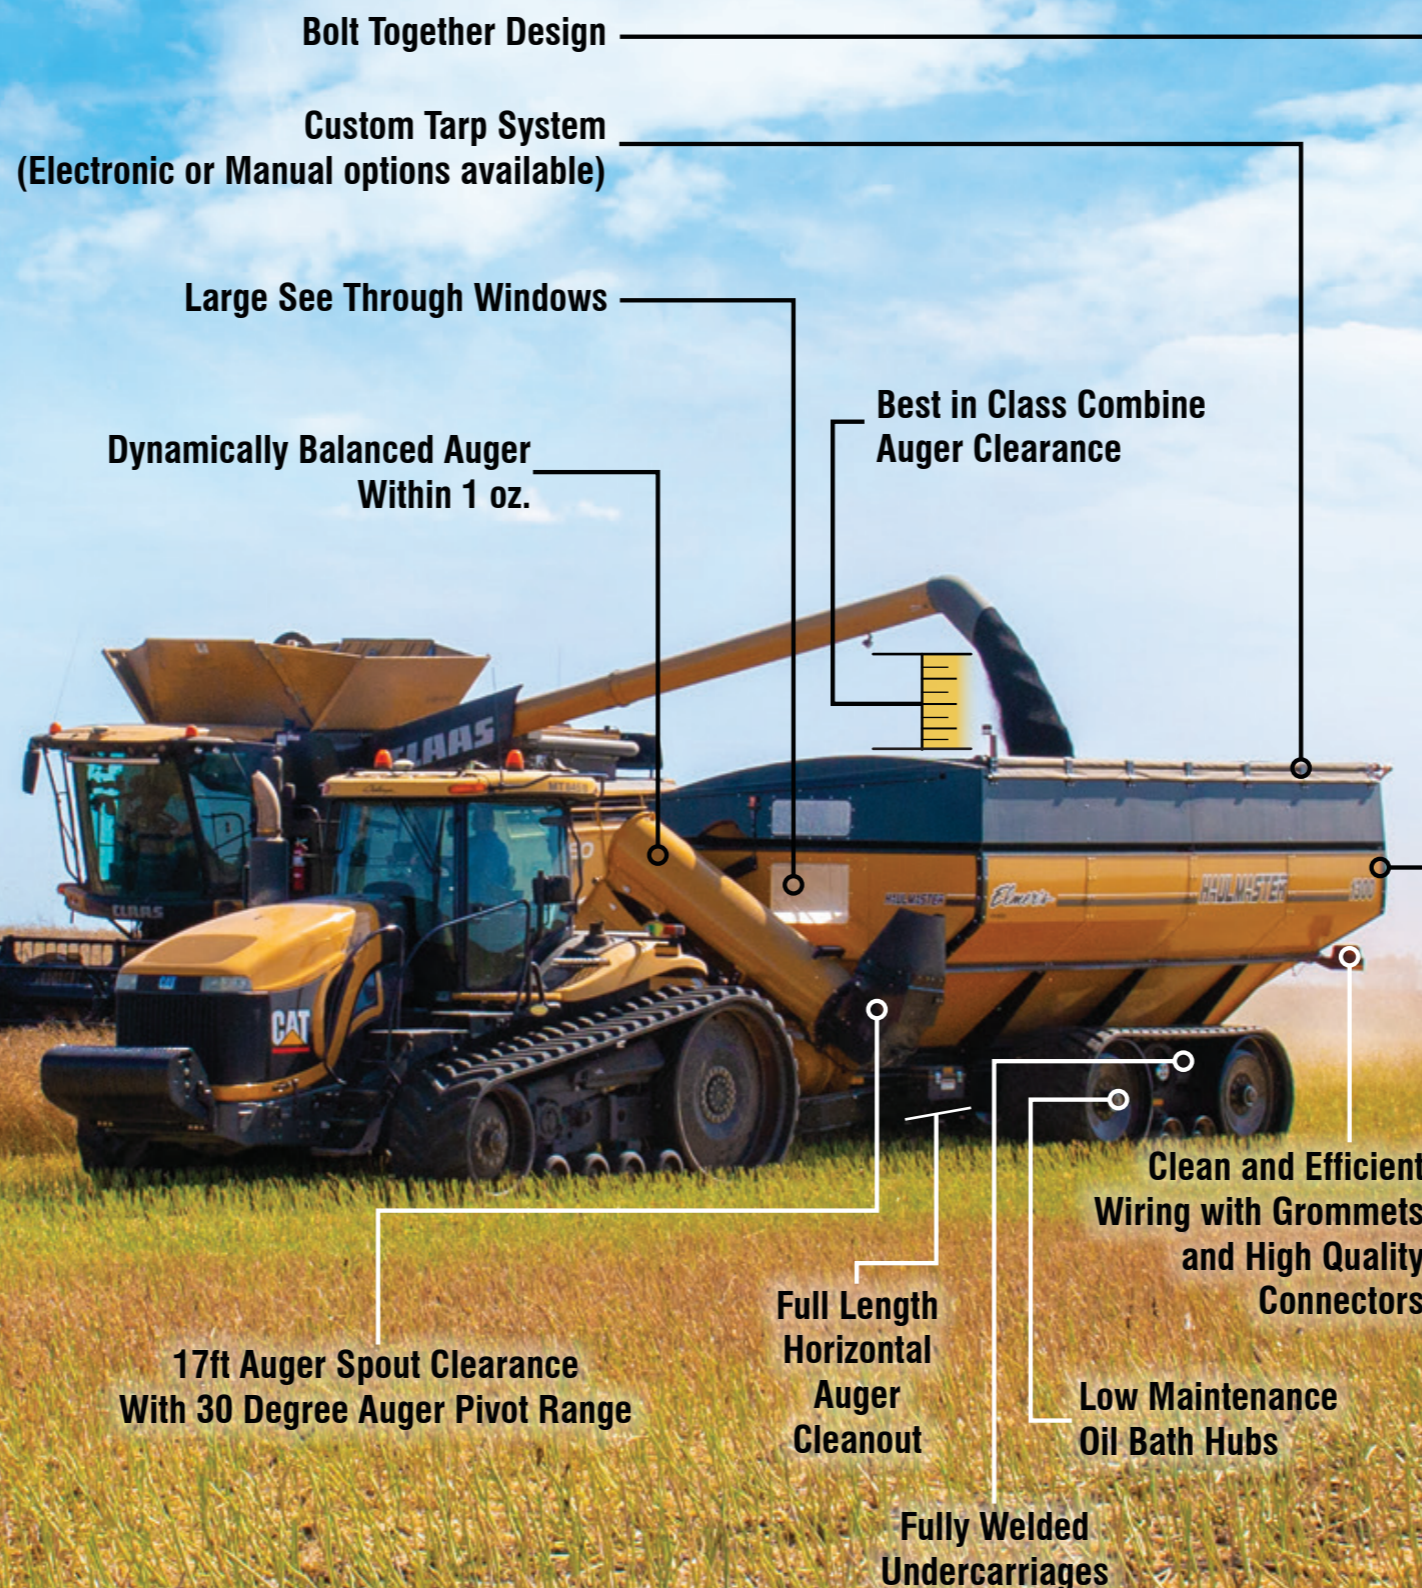

**AVAILABLE SIZES**  
1100 • 1300 • 1600 • 2000

# HAULMASTER PRO



Smart and simple hydraulic system giving the operator advanced, patent pending, tools to be faster and more efficient.

- Industry exclusive double tap to auger fold/unfold.
- Industry leading auger fold/unfold speed.
- Auto spout return home on fold.
- Comfortable joystick control for gate, pivot, fold and spout.
- 4-way spout control with double axis proportional joystick.
- Auto gate close for specific truck weight.
- Gate auto close option at 3 MPH.
- Virtual joystick option on tablet
- Includes HAULMASTER CONNECT.
- Simple connection, uses 1 hydraulic remote and standard 7 pin plug.

## HAULMASTER CONNECT

Smart interface to interact with your HAULMASTER features.

- Detailed Load Tracking.
- Information stored on Controller, not tablet.
- Export load data to email.
- GPS load tagging.
- No Battery required.
- Multiple tablets possible.
- Turn Key Package.

